




WM652 Speaker Mounting Template

For use with Pair of WM652 Speakers (13785753)
and speakers included in West Marine packages:
WM7000 (15004484)
WM4000 (14681118)
WM3000RF (12246021)

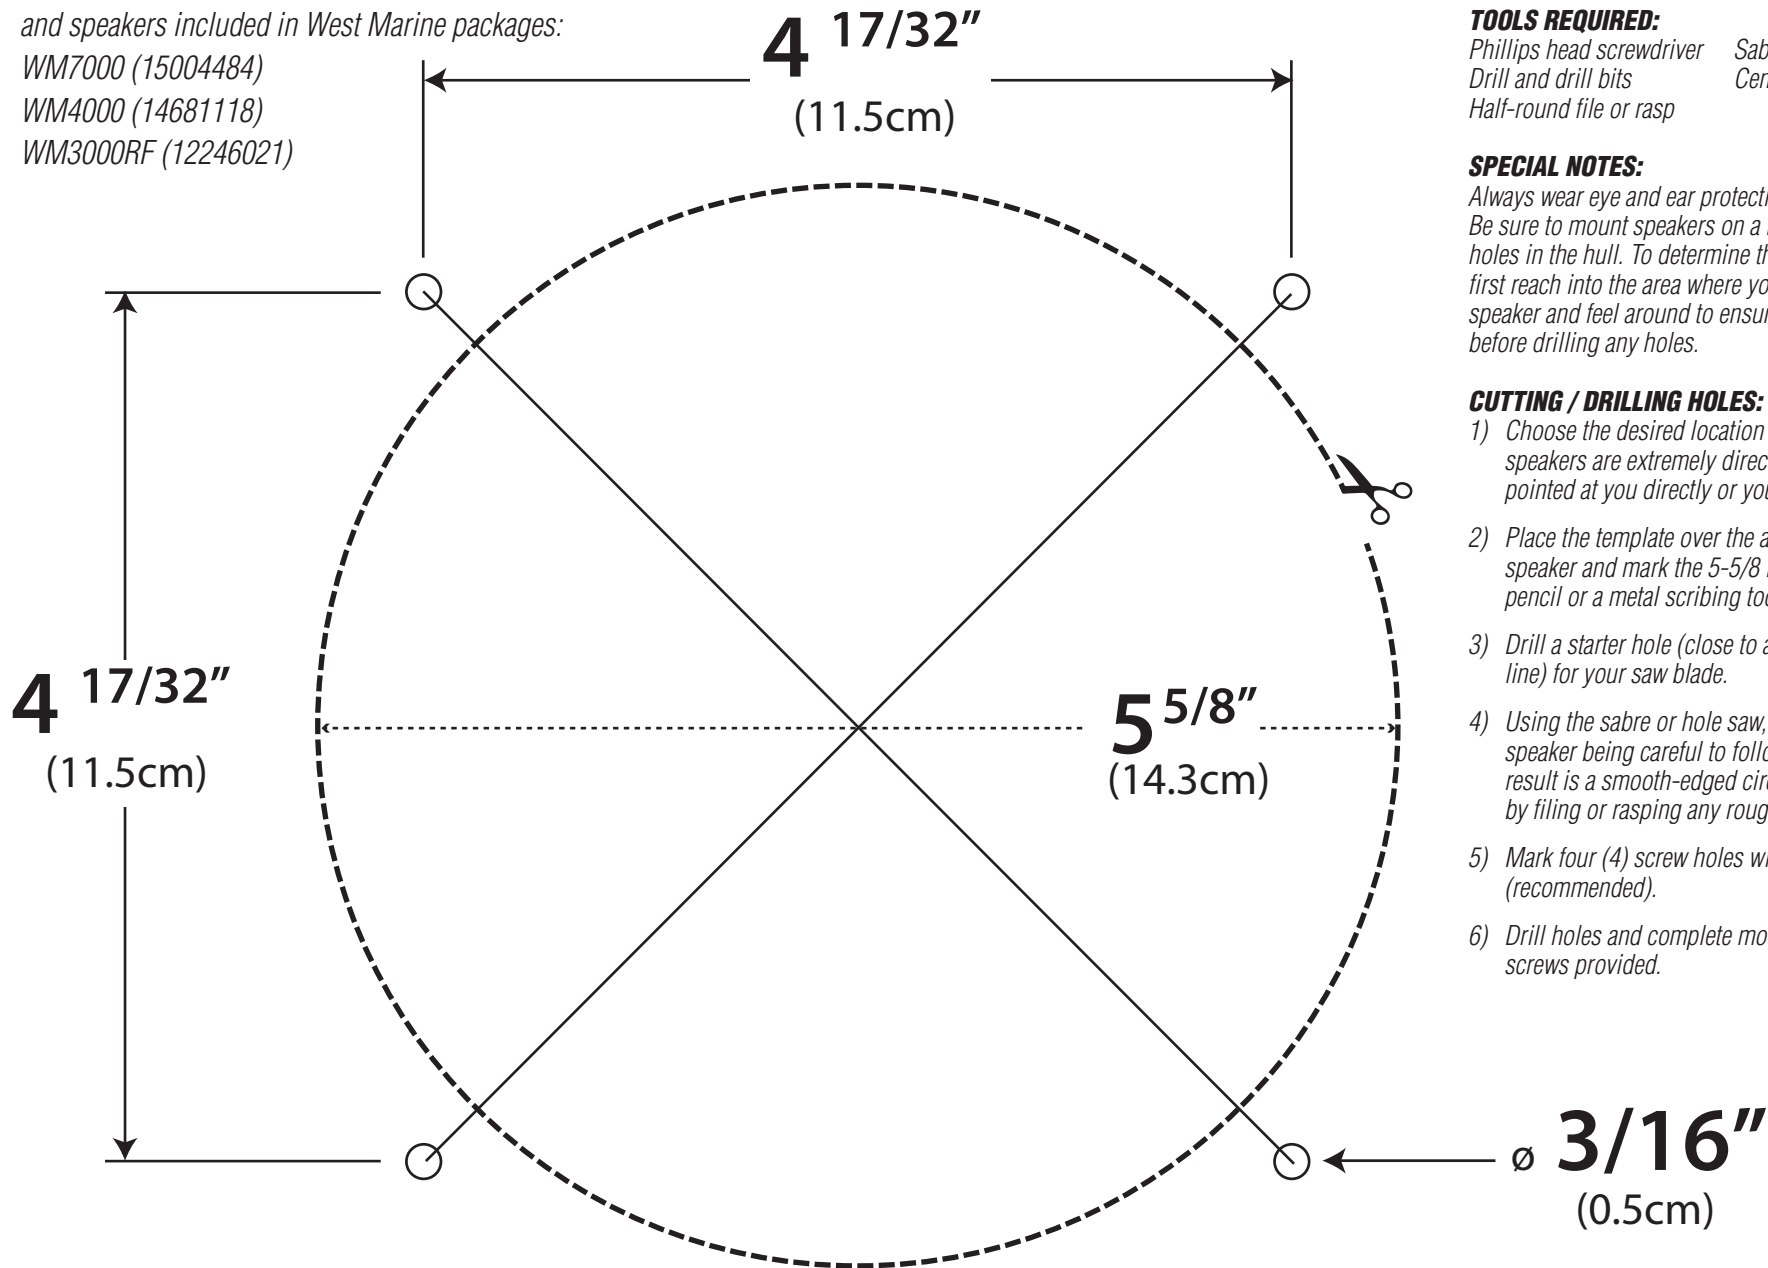

TOOLS REQUIRED:

Phillips head screwdriver Sabre or hole saw
Drill and drill bits Center punch or awl
Half-round file or rasp

SPECIAL NOTES:

Always wear eye and ear protection and a dust mask.
Be sure to mount speakers on a bulkhead only, never cut holes in the hull. To determine that there is enough room, first reach into the area where you would like to mount the speaker and feel around to ensure there is ample space before drilling any holes.

CUTTING / DRILLING HOLES:

- 1) Choose the desired location for your speakers. As boat speakers are extremely directional, they should be pointed at you directly or you won't get the full sound.
- 2) Place the template over the area designated for the speaker and mark the 5-5/8 inch (14.3cm) hole with a pencil or a metal scribing tool.
- 3) Drill a starter hole (close to and on the inside of the line) for your saw blade.
- 4) Using the sabre or hole saw, cut the hole for your speaker being careful to follow the line so the end result is a smooth-edged circular hole. Finish the hole by filing or rasping any rough edges.
- 5) Mark four (4) screw holes with pencil or center punch (recommended).
- 6) Drill holes and complete mounting your speaker with screws provided.