




# NEW STANDARD PORTLIGHT

The New Standard Portlight completes the family look with the Atlantic and Ocean Portlights. The Standard Portlight is stylish, has clear visibility, is easy to use, simple to install and competitively priced. CE Area 1 models are pressure tested to 5psi (35kPa) and CE Area 2 models to 2psi (14kPa).



## New Standard Portlight Sizes

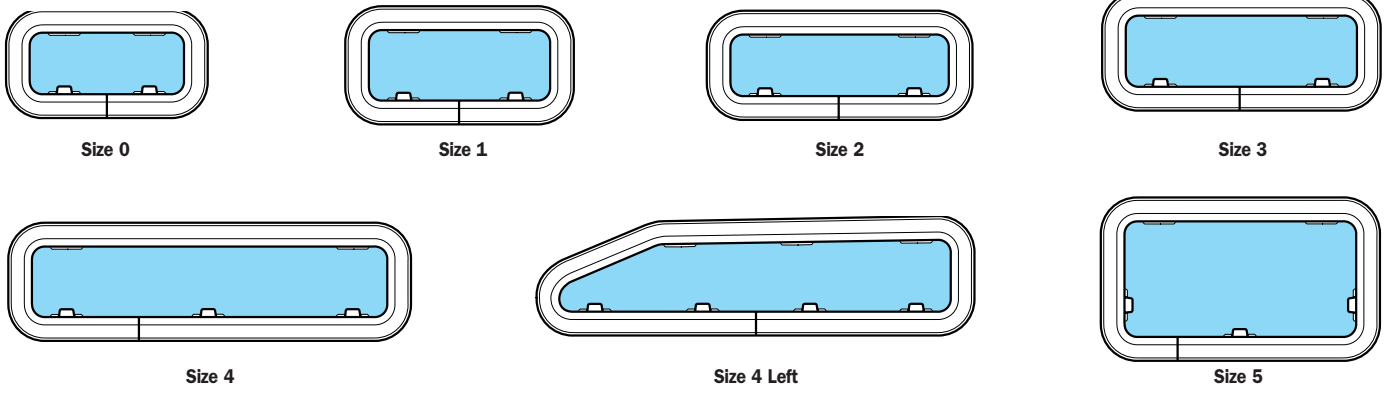

**CE Approved** The New Standard Portlight when used on Sailing Monohulls, Sailing Multihulls and Powerboats, installed as outlined in the table complies with International Standards ISO/DIS 12216.2(E) Small Craft up to 24m. This standard covers the applicable essential safety requirements of the Recreational Craft Directive 94/25/EC.

Size	Area 1	Area 2
Fixed 0 to 2	✓	✓
Fixed 3 to 5		✓
All Opening Sizes		✓

Note: Area 1 = Hull above waterline  
Area 2 = Deck, Coachroof, Cockpit & Transom

## Ease Of Installation

- ABS Plastic Trim has been improved and now is held into position by mechanically clipping onto the inner frame.
- Can be installed with a conventional sealant or a closed cell PVC tape.
- Cut out shape is very simple and does not require cutting around handles or hinges.
- Easily fitted by clamping the cabin sides between inner and outer frame with the provided screws which are fastened into the outer frame.


## New Standard Portlight Specifications

Part Number	Size	Version	Acrylic Colour (Ivory Trim Standard)	Overall Size				Cut-Out Size			Wght kg lb	Acrylic Window Thickness mm/ in
				X Width mm/ in	Y Lgth mm/ in	Z Hght mm/ in	R Rad mm/ in	X1 Cut-Out Width mm/ in	Y1 Cut-Out Lgth mm/ in	R1 Cut-Out Rad mm/ in		
393010500 393012500 393020500 393022500	0	Opening Opening Opening Opening	Smk Grey Clear Smk Grey Clear	176 6 1/8	323 12 1/8	4 1/2	62 2 1/2	156 6 1/8	303 11 1/8	52 2 1/8	1.1 2.42	8/32
393110500 393112500 393120500 393122500	1	Fixed Fixed Opening Opening	Smk Grey Clear Smk Grey Clear	191 7 1/2	367 14 1/2	4 1/2	62 2 1/2	171 6 3/4	347 13 3/4	52 2 1/8	1.3 2.86	8/32
393210500 393212500 393220500 393222500	2	Fixed Fixed Opening Opening	Smk Grey Clear Smk Grey Clear	176 6 1/8	425 16 3/4	4 1/2	62 2 1/2	156 6 1/8	405 15 1/8	52 2 1/8	1.4 3.08	8/32
393310500 393312500 393320500 393322500	3	Fixed Fixed Opening Opening	Smk Grey Clear Smk Grey Clear	191 7 1/2	449 17 1/8	4 1/2	62 2 1/2	171 6 3/4	429 16 1/2	52 2 1/8	1.7 3.74	10/32
393410500 393412500 393420500 393422500	4	Fixed Fixed Opening Opening	Smk Grey Clear Smk Grey Clear	191 7 1/2	646 25 1/8	4 1/2	62 2 1/2	171 6 3/4	627 24 1/8	52 2 1/8	2.4 5.28	8/32
★ 393430500 ★ 393432500 ★ 393440500 ★ 393442500 ★ 393450500 ★ 393452500 ★ 393460500 ★ 393462500	4R 4R 4R 4R 4L 4L 4L 4L	Fixed Fixed Opening Opening Fixed Fixed Opening Opening	Smk Grey Clear Smk Grey Clear Smk Grey Clear Smk Grey Clear	195 7 1/8	708 27 1/2	4 1/2	62 2 1/2	175 6 1/2	688 27 1/8	52 2 1/8	2.4 5.28	8/32
★ 393520500 ★ 393522500	5	Opening Opening	Smk Grey Clear	264 10 3/8	449 17 1/8	4 1/2	62 2 1/2	244 9 5/8	429 16 1/2	52 2 1/8	2.3 5.15	10/32

- All Portlights are supplied complete with 12 off M5 25mm screws (hull thickness 17-22mm).
- Flyscreens not available for size 4R & 4L.
- Part No's marked with a ★ are made to order.

- Maximum hull thickness 34mm (1 1/8 in), minimum hull thickness 7mm (1/4 in).
- Portlights should be fitted to a flat surface with maximum tolerance ± 1mm.

## New Standard Portlight Dimensions

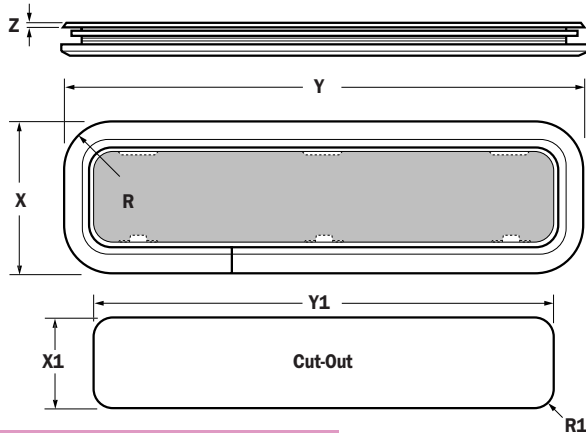

New Standard Portlight interior with ivory trim



"Dehler 29" racer/cruiser fitted with New Standard portlights & Lewmar hatches.

